


**TO ORDER CALL: +61 8 8260 2277 OR
CONTACT YOUR LOCAL MANUTEC DEALER**

WHEEL & TYRE OPTIONS 15", 16" & 18" WHEELS

15" & 18" SEMI-SOLID TYRE PROFILES	15" SOLID TYRE PROFILES	15" S/P TYRE PROFILES	16" SOLID & S/P TYRE PROFILES	18" SOLID & S/P TYRE PROFILES
---	--	--	--	--

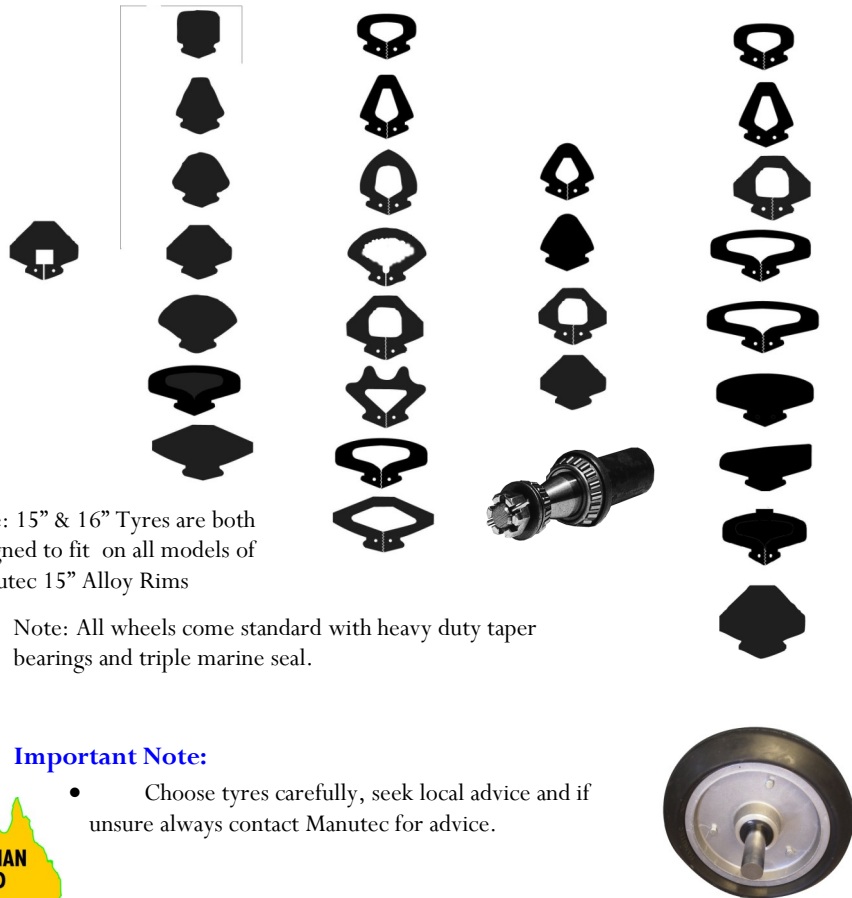

Note: 15" & 16" Tyres are both designed to fit on all models of Manutec 15" Alloy Rims

Note: All wheels come standard with heavy duty taper bearings and triple marine seal.

Important Note:

- Choose tyres carefully, seek local advice and if unsure always contact Manutec for advice.



- Press Wheels Assemblies
- Tyne Mounts
- Walking Wheels
- Extension Arms
- In-Frame
- Seed Tubes
- Gangs
- Packer Wheels
- Coulters
- Ag Bearings
- Ag Seals
- Tyres
- Springs
- U-Bolts
- Harrows
- Swivel Arms
- Bar Mounts
- Spare Parts
- Wheels
- Wheel Centres
- Axles
- Overcaps
- Seal Guards
- Hubs
- Stubs
- Quick Release
- Rocker Arms
- Adjustable Arms
- Fixed Arms
- Integral Hubs
- Discs
- Gauge Wheels
- Planter Wheels
- Custom Wheels
- Adjustable Stands
- Adjustable Legs
- Parallelograms
- Brackets
- DIY
- R&D
- Accessories



**AGRICULTURAL EQUIPMENT
PRESS WHEELS**



WALKING WHEELS

For more detailed information and pricing, visit our website.
www.manutec.com.au

Walking Wheel Assemblies

Walking Wheel Assemblies are a cost effective option that utilizes one single bracket and arms to run a pair of wheels offset fore and aft. They are available in swivel and fixed variants. Walking Wheels are mounted across the back of the machine either on the existing bar (space permitting) or on a new purpose built tool bar. Walking Wheels have adjustable axles and generally will suit spacings from 6" to 13", lower and higher spacing can be achieved however Manutec recommends that other options may be better considered. Walking Wheel Assemblies come standard fitted with Integral Hub Press Wheels in either 15", 16" or 18" Solid and Semi-Pneumatic Wheel profiles. Variants are available with HT Hubs if desired.

**TO ORDER CALL: +61 8 8260 2277 OR
CONTACT YOUR LOCAL MANUTEC DEALER**

WALKING WHEEL ASSEMBLIES

Twin Walking Wheel Assembly (15" Wheels)

Black (Super Zinc) Twin Walking Wheel Assembly with 15" Diameter Integral Hub Press Wheels (Replace + with desired tyre code)



**15PWTWASS+
15PWTWASS+**

Twin Walking Wheel Assembly (18" Wheels)

Black (Super Zinc) Twin Walking Wheel Assembly with 18" Diameter Integral Hub Press Wheels



**18PWTWASS+
18PWTWASS+**

Mounting Options

Brackets to suit mounting to 3", 4" or Diamond Bar. Depending on machine configuration and spacing units may be attached to existing rear toolbar, if not a new toolbar will need to be fitted. U-Bolts supplied. Extension Arms also available.

18" Wheels Vs 15" Wheels

18" wheels are generally selected in situations where either extra ground clearance is desired by the customer or in extremely sticky soils where the bigger wheel will clean slightly better. The 18" wheels with their larger rolling diameter will have less wear and will also require less maintenance. The 18" wheels will however add extra weight and cost.

Twin Walking Wheel Assembly Single Wheel Option (15" Wheels)

For machines with an odd number of tynes, when utilizing a twin wheel system, or for customers wishing to use all single assemblies.



**15PWSWASS+
15PWSWASS+**

For a complete review of all press wheel and coultter options visit us on the web at www.manutec.com.au

Twin Walking Wheel Assembly Single Wheel Option (18" Wheels)

For machines with an odd number of tynes, or for customers wishing to use all single assemblies.



**18PWSWASSRED+
18PWSWASSGRY+**

Walk Limiter (PWWALKLIMIT)

Fits above walking beam, adjustable to limit degree of walk/drop on beam. Also can be used on centre section of machines, when lifting assemblies, in order to limit the amount of drop.



PWWALKLIMIT

Axle Protectors (PWAXLEPROT)

Fits over ends of axles to prevent damage to dust caps on adjacent wheels. Also available is the PWOCAPIH which is a steel cap for extra protection.



PWAXLEPROT

HT Hub & Stub Variant

As per normal assembly except Integral Hubs replaced with HT Hubs. Also need to order 60mm HT Overcaps



Swivel to Fixed Conversion Kit

Conversion Kit for "Fixing" Swivel on Walking Wheels



PWWWASSFIX

MANUTEC
Tyre selection information sheets are available at www.manutec.com.au