


**TO ORDER CALL: +61 8 8260 2277 OR  
CONTACT YOUR LOCAL MANUTEC DEALER**

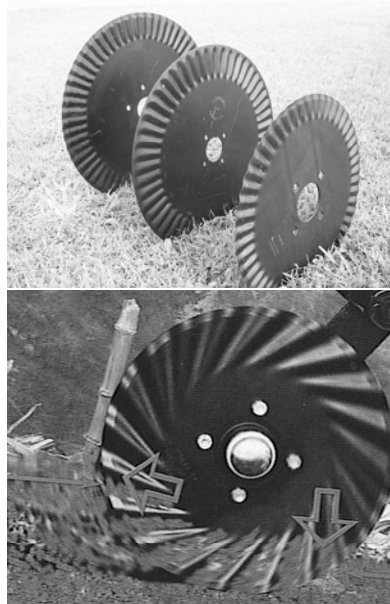

The Manutec range of Coulters has been designed to be fitted to either the existing bar or a new tool bar using 3" or 4" Ubolts. Normally Coulters are fitted as twins as they cut better in a twin configuration.

Manutec Coulters are fitted to the Coulters using a Cast Iron Hub, fitted with a 40mm Round Axle, LM Tapered Automotive Roller Bearings and triple Marine Seals. An additional layer of protection is provided with a Galvanised Steel Overcap.

The Coulters discs are high grade hardened and heat treated high tensile steel. Brackets and Arms are a variety of cast steel and fabricated steel components. Swivel joints are a combination of bronze bushes and roller bearings.



- Press Wheels
- Assemblies
- Tyne Mounts
- Walking Wheels
- Extension Arms
- Gangs
- In-Frame
- Seed Tubes
- Packer Wheels
- Coulters
- Ag Bearings
- Ag Seals
- Tyres
- Springs
- U-Bolts
- Harrows
- Swivel Arms
- Bar Mounts
- Spare Parts
- Wheels
- Wheel Centres
- Axles
- Overcaps
- Seal Guards
- Hubs
- Stubs
- Quick Release
- Rocker Arms
- Adjustable
- Arms
- Fixed Arms
- Integral Hubs
- Discs
- Gauge Wheels
- Planter Wheels
- Custom Wheels
- Adjustable
- Stands
- Adjustable Legs
- Parallelograms
- Brackets
- DIY



## AGRICULTURAL EQUIPMENT COULTER ASSEMBLIES



For more detailed information and pricing, visit our website.  
[www.manutec.com.au](http://www.manutec.com.au)

### Coulters

Manutec coulters are available in single and twin disc variants in set-under and setback disc positions, 18" plain and fluted and 20" plain disc sizes are available. Other disc styles and sizes are available by enquiry. All coulters come standard with HT Hubs and 40mm Round Stub Axles, with Taper Bearings and Marine Triple Seal. Twin Coulters are available in angled and straight running positions in configurations to suit both wide and narrow spacings. Coulters Cheeks are available to be fitted to assist with hair pin reduction or increased flotation in light soils. 3" and 4" mounting options are available.

# COULTER ASSEMBLIES



**Single Disc Coulters—Set-under**  
PWCOULTERSINGLEPL - 18" - Plain  
PWCOULTERSINGLEFL - 18" Fluted

Disc position under mounting bar

Plain versus Fluted. Generally the fluted disc will cut better and has a degree of self sharpening. The plain will clean better in heavy soils.



**Twin Disc Coulters—Set-under**  
PWCOULTERTWINPL - 18" Plain  
PWCOULTERTWINFL - 18" Fluted

Disc position under mounting bar

All twin coulters have an off vertical angle applied to the disc, this assists with keeping discs sharp and clean.



**Single Disc Coulters—Setback**  
PWTRAILCOULTSINGLEPL - 18" Plain  
PWTRAILCOULTSINGLEFL - 18" Fluted

Disc position setback behind mounting bar.



**Twin Disc Coulters—Setback**  
PWTRAILCOULTERTWINPL - 18" Plain  
PWTRAILCOULTERTWINFL - 18" Fluted

Disc position setback behind mounting bar.

All twin coulters have an off vertical angle applied to the disc, this assists with keeping discs sharp and clean.



**18" and 20" Plain and Fluted Discs**

**For other sizes and styles please call for a quote and availability.**

PWCOULTERDISC18PL  
PWCOULTERDISC18FL  
PWCOULTERDISC20PL



**Coulters Hubs**

Slim-line (for narrow spacings) and standard HT Hubs are available in round and square shaft types.



**Coulters Cheeks**

12" and 14" Hard Rubber Cheeks  
PWCOULCHEEK12  
PWCOULCHEEK14

