


**TO ORDER CALL: +61 8 8260 2277 OR
CONTACT YOUR LOCAL MANUTEC DEALER**

WHEEL & TYRE OPTIONS 15", 16" & 18" WHEELS

15" & 18" SEMI-SOLID TYRE PROFILES	15" SOLID TYRE PROFILES	15" S/P TYRE PROFILES	16" SOLID & S/P TYRE PROFILES	18" SOLID & S/P TYRE PROFILES
---	--	--	--	--

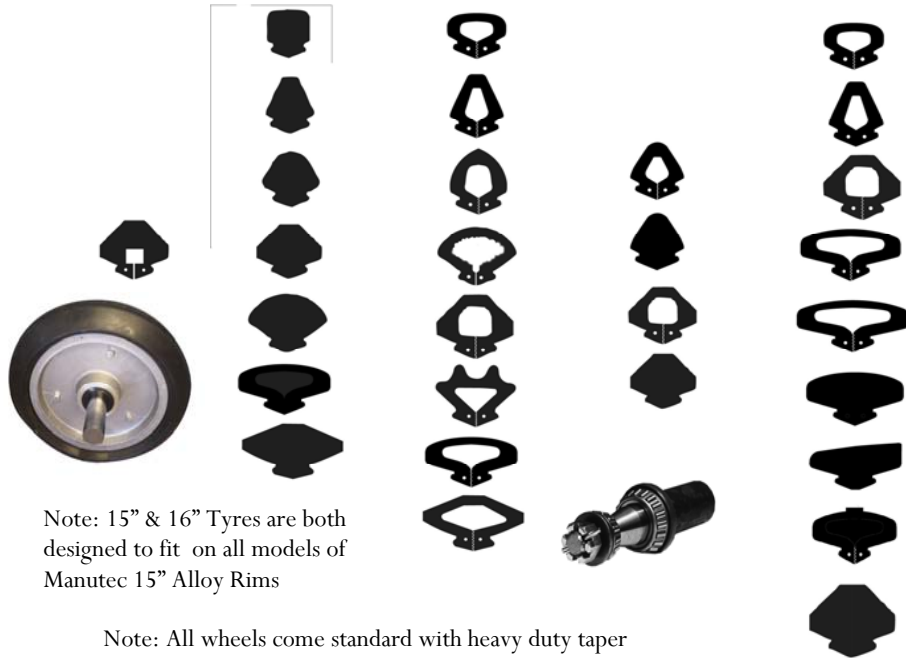

Note: 15" & 16" Tyres are both designed to fit on all models of Manutec 15" Alloy Rims

Note: All wheels come standard with heavy duty taper bearings and triple marine seal.

Important Note:

- Choose tyres carefully, seek local advice and if unsure always contact Manutec for advice.



**AGRICULTURAL EQUIPMENT
PRESS WHEELS**



SWIVEL ASSEMBLIES

For more detailed information and pricing, visit our website.
www.manutec.com.au

Swivel Arm Assemblies

Swivel Arm Assemblies are designed to be mounted either on the rear frame of a machine or on a false mounted off the rear frame. Swivel Arm assemblies can be used in conjunction with walking wheels or independently. They are not recommended to be used independently for spacings of 10" or below unless they are staggered or used in a double ended axle configuration.

- Press Wheels
- Assemblies
- Tyne Mounts
- Walking Wheels
- Extension Arms
- Seed Tubes
- Gangs
- Packer Wheels
- Coulters
- Ag Bearings
- Ag Seals
- Tyres
- Springs
- U-Bolts
- Harrows
- Swivel Arms
- Bar Mounts
- Spare Parts
- Wheels
- Wheel Centres
- Axles
- Overcaps
- Seal Guards
- Hubs
- Stubs
- Quick Release
- Rocker Arms
- Adjustable
- Arms
- Fixed Arms
- Integral Hubs
- Discs
- Gauge Wheels
- Planter Wheels
- Custom Wheels
- Adjustable
- Stands
- Adjustable Legs
- Parallelograms
- Brackets
- DIY
- R&D



This picture shows rear mounted swivel assemblies set up as twin fixed spacing assemblies across the back of a machine. A double ended axle is used in this configuration.



These two pictures show single swivel assemblies set up in a staggered configuration across the back of a machine with seed tubes fitted. Seed tubes are available to be adapted to these units

For a full list of accessories available with Swivel Arm Assemblies see the Walking Wheel section of this catalogue or visit us on the web at www.manutec.com.au

TO ORDER CALL: +61 8 8260 2277 OR CONTACT YOUR LOCAL MANUTEC DEALER



Single Swivel Arm Assembly - (15" Wheels)

Used either in conjunction with walking wheels or individually for machines with 10" plus spacings.

15PWSWWASSRED+



Twin Fixed Spacing Swivel Arm Assembly (No Rock) - (15" and 18" Wheels)

Used on machines with fixed spacing where spacing adjustment and a rocking action is not required. Seed Tubes not supplied as standard.

**15PWTWSSASSRED+
15PWTWSSASSGRY+
18PWTWSSASSRED+
18PWTWSSASSGRY+**



Twin Variable Spacing Rocker Swivel Arm Assemblies - (15" and 18" Wheels)

Used on machines where spacing adjustment and a rocking action is required and the customer wants the wheels side by side rather than fore and aft. Normally used with 15" wheels, although 18" wheels can be used on wider spacings.

**15PWTWOFFRED+
15PWTWOFFGRY+**



Swivel Arm Assemblies - (18" Wheels)

Used either in conjunction with walking wheels or individually for machines with 10" plus spacings.

18PWSWWASSRED+

**MANUTEC
FOR THE FULL RANGE OF MANUTEC PRODUCTS VISIT www.manutec.com.au**